


水柱塞 COOLING CIRCUIT PLUGS

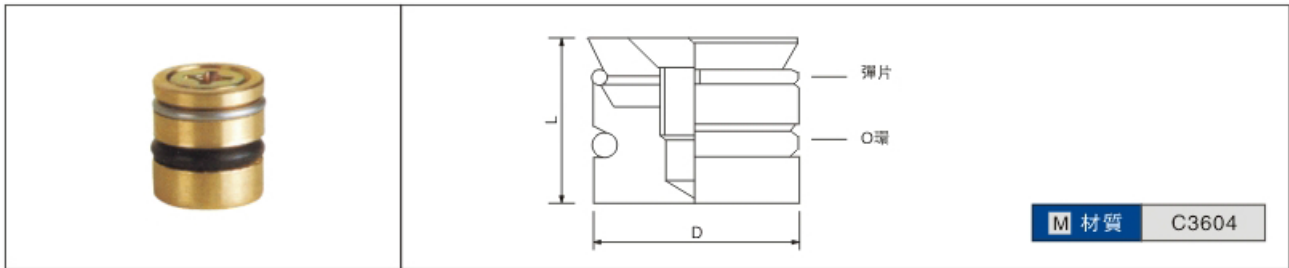

■ 特性:

在塑膠模在或任何水道冷却或加温系統中，有關於填塞的作用，依照所需的流向配合。

加工方法:

- 1、任一規格模具孔徑應該比水柱塞外徑大0.1mm。
例如：8mm（外徑）之柱塞，其模具孔應為8.1mm。
- 2.水柱塞在水道中，如没有定位，可先放鬆，然後用空氣槍噴出，重新定位。

原理:

利用斜度原理，使O-RING 及彈片擴大而達到填塞的作用。


承受力:

- 水柱塞8mm 16kg/cm²以上
- 水柱塞10mm 17kg/cm²以上
- 水柱塞12mm 19kg/cm²以上

特殊性:

- 1.不需攻牙,不生鏽.
- 2.可調整鬆緊,不需止泄帶.
- 3.可隨意移動,放置水道中的任何定點.
- 4.水冷却、水加温、油冷却、油加温.
- 5、一般工作溫度-5~+135℃
- 6、特殊工作溫度-10~+280℃

使用例

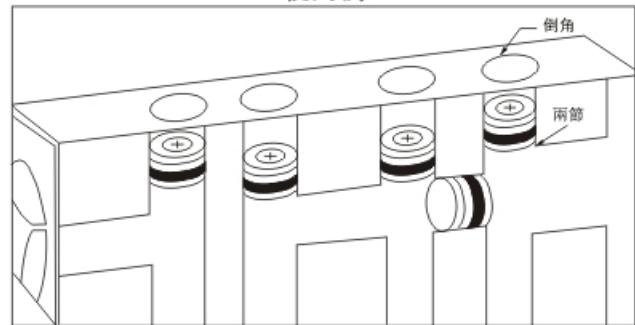

版權所有
製必究

■ Features:

Based on the water flow directions, any of the cooling and heating systems will have the fitting function in the plastic molds/

How to use it:

1. when installing into molds, please make sure the space is at least 0.1mm wider than cooling circuit plugs.
2. if there is no specific setting for the cooling circuit plugs: first release, then using the air spray to reset.

Theory:

According to sloping method, the o-ring and springs will enlarge to fit the cooling circuit plugs.

Pressure capacity:

Using:

- 8mm cooling circuit plugs for over 16kg/cm²
- 10mm cooling circuit plugs for over 17 kg/cm²
- 12mm cooling circuit plugs for over 19kg/cm²

Specialty:

- 1.No tapping, no rust
- 2.Can be adjusted for tightness
- 3.Can be placed at any water path and moved accordingly.
- 4.Can be cooling down or heating up by water or oil.
- 5.Under normal operating temperature: -5~+135℃
- 6.Special operating temperature: -10~+280℃

Item No.	Item No.	
	D	L
CCP	8	10
	10	11
	12	12
	16	14
	20	16
	25	18



編號 Item No. - L
CCP 12 - 12



在庫品 隔日出貨