


波浪彈性墊圈

WW783

台規

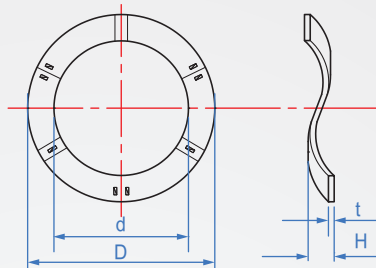

材質	硬度	表面處理
高碳鋼	HRC40~50	染黑

How to order

WW783 - 18

 TYPE No.

※適用於推力負荷之用，尤其適用於
徑向空間有限的場合使用。
例：滾珠軸承的軸向負荷。

版權所有 重製必究

單位: mm								
No.	D	公差	d	公差	H	公差	t	公差
3	6.5		3.4		1.0		0.2	±0.020
4	8.0		4.3		1.5		0.2	±0.025
5	9.0		5.4		1.5	+0.5 -0	0.3	
6	11.0		6.4		1.5		0.3	
8	12.5		8.5		2.0		0.3	
9	13.5		9.5		2.0		0.3	
10	14.5	+0	10.5	+0.30	2.0		0.3	
12	17.0	-0.5	12.5	-0.15	2.5		0.3	
14	20.0		14.5		2.5		0.3	
15	21.6		15.6		2.5	+0.7 -0	0.3	
16	22.5		16.7		2.5		0.3	
17	23.2		17.3		2.5		0.3	
18	26.0		18.7		3.0		0.3	
20	29.1		20.7		3.0		0.3	