

滾珠滾輪組件 BR879

TYPE	主珠	本體	輔助珠	間隔環	滾輪架
HB 六角螺栓	SUS440C HRC55~	SUS304	SUS440C HRC55~	SUS304	A6063 (白色陽極)
	樹脂球				
PF 壓入式	SUS440C HRC55~	SUS304	SUS440C HRC55~	SUS304	A6063 (白色陽極)
	樹脂球				




How to order




HB：六角螺栓

▶全長200 滾輪數：4




PF：壓入式


▶全長200 滾輪數：4

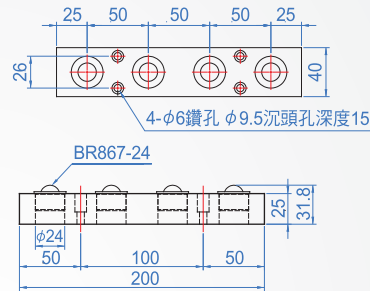


▶全長400 滾輪數：8

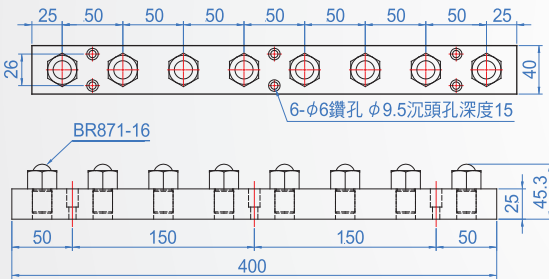


▶全長400 滾輪數：8

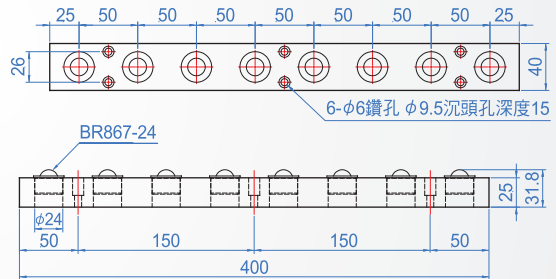


▶全長600 滾輪數：12

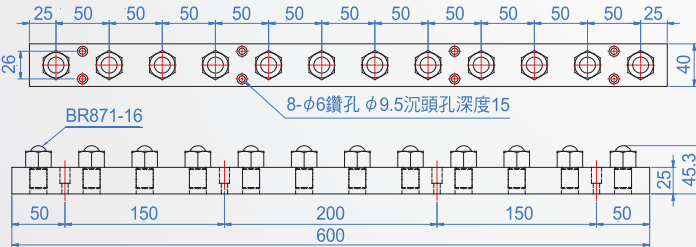

▶全長600 滾輪數：12

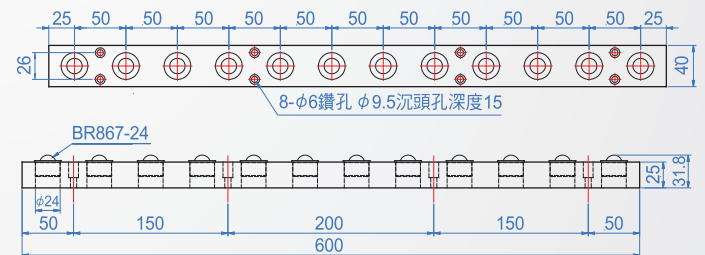

※使用例

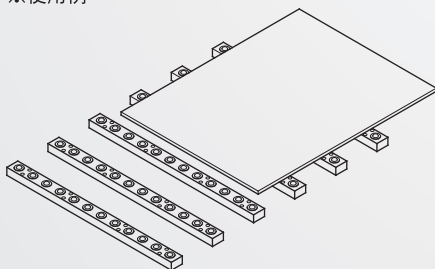

2

單位：mm

全長NO.	滾珠滾輪的使用		
	形狀	規格	一個承受負載 N
200	六角螺栓	BR871	343
	六角螺栓	BR871-POM	69
400	壓入型	BR867	343
	壓入型	BR867-POM	69

kgf=N×0.101972