
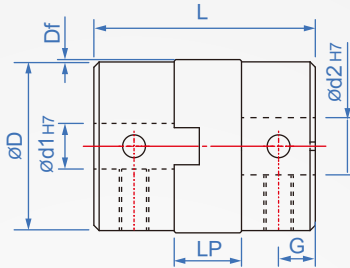


銅環-十字形
KL432
止付固定



本體	緩衝材	螺絲
SUS304	鉛青銅	CM435 (染黑)

How to order

KL432 - 20 - 5 x 6
 TYPE 外徑 d1xd2

新JIS-B-1301

鍵槽加工

例：KL432 - 20 - K5 x K6

外徑 D	L	內孔指定 d1、d2		Df	LP	G	M	螺絲緊固 扭矩 (N·M)	最大扭力 (N·M)	最高回轉速 (rpm/min)	慣性力矩 (kg·m ²)	靜態扭轉 彈簧係數 (N·m/rad)	容許 軸向位移	容許 偏角	質量(g)
		min.	max.												
12	14.4	4	~ 6.35	0.25	4.0	2.5	M3	1.2	2.5	9000	2.0x10 ⁻⁷	250	±0.1	0.6°	8.5
14.5	16	4	~ 6.35	0.25	5.4	3			3	7000	4.5x10 ⁻⁷				800
17	19.8	5	~ 8	0.25	6.3	3.2	M4	2.5	5	6500	1.0x10 ⁻⁶	900	±0.1	0.6°	25
20	21.4	5	~ 8	0.5	7.3				7	5000	2.25x10 ⁻⁶				2000
26	25.6	5	~ 12	0.5	7.5	3.8	M5	5	10	5000	7.5x10 ⁻⁶	3500	±0.2	0.6°	79
30	33	5	~ 12	0.5	8.8	5.8			24	5000	2.5x10 ⁻⁵				5000
34	34	5	~ 16	0.5	8.5	7.0	M5	5	32	3500	4.0x10 ⁻⁵	7500	±0.2	0.6°	180
38	39.5	5	~ 16	0.5	9.7				7.0	50	3500				5.2x10 ⁻⁵
45	43.6	8	~ 22	1.5	13.6	7.5	M6	8	9000	1.7x10 ⁻⁴	65000	±0.3	0.2°	400	
55	49.4	10	~ 25	1.5	15.4	8.5			75	9000	3.3x10 ⁻⁴			90000	750
70	57	12	~ 35	2	17.0	11	M8	20	95	9000	1.1x10 ⁻³	170000	±0.6	0.2°	1050

單位：mm

版權所有
重製必究