
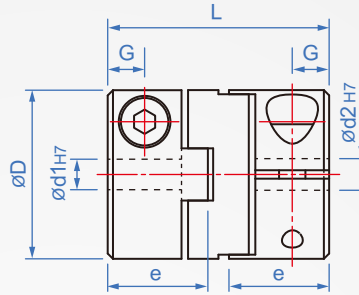


Cross slider
GC433
Cushion type
clamping



Ontology	Cushioning material	Stop screw
AL High strength aluminum alloy (White anode)	PA66	CM435 (Dye black)

How to order

1
2
3

GC433 - 20 - 33 - 5x6

| | | |
 TYPE D L d1xd2

1		2		3		unit : mm					
D	L	Inner hole designation d1-d2 min. max.			Maximum torque (N · m)	Max. return speed (rpm/min)	Moment of inertia (kg · m ²)	Static torsion spring coefficient (N · m/rad)	Weight(g)		
16	29	4	~ 6.35	12.5	M2.5	3	0.7	9000	3.5x10 ⁻⁷	30	12
20	33	5	~ 8	14.1		3.8	1.2	7000	1.5x10 ⁻⁶	58	19
25	39	5	~ 12	16.9	M3	3.9	2	6000	3.2x10 ⁻⁶	130	35
32	45	5	~ 16	20	M4	4.5	4.5	4800	1.5x10 ⁻⁵	270	67
40	50	8	~ 19	23	M5	5.5	9	3600	4.2x10 ⁻⁵	520	114
44	46	8	~ 22	20.7		7	12	3500	4.5x10 ⁻⁵		140
50	53	10	~ 24	24.2	M6	7.5	19	3000	1.0x10 ⁻⁵	800	190
50	58	10	~ 24	26.5		6.3			25		1.1x10 ⁻⁴
55	57	10	~ 28				26.5	6.3			25
70	77	16	~ 38	32	M8	7.7	56	2500	4.1x10 ⁻⁴	1260	520

Allowable axial displacement ±0.2mm , allowable declination:3°

Copyright © CHENA INDUSTRIAL CO.,LTD ALL RIGHTS RESERVED.