





Pitch : 5.08mm

XL

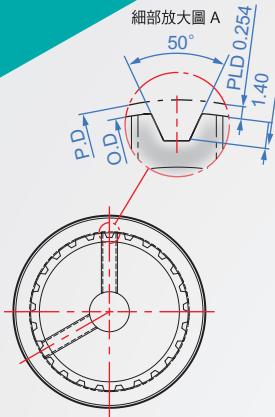

皮帶寬度	019 (4.8mm)	025 (6.4mm)	031 (7.9mm)	037 (9.5mm)	050 (12.7mm)	075 (19.1mm)
共通尺寸	A=6 W=10 L=19	A=7.5 W=12.5 L=21.5	A=9 W=14 L=23	A=11 W=16 L=25	A=14 W=19 L=28	A=21 W=26 L=35

How to order

1 2 3 4

15 - XL-025 - AF - H4 -

齒數 TYPE 外形 孔形
寬度 軸徑


選擇表面處理

AS.....白色陽極
AB.....黑色陽極
AN.....無電解鍍
AK.....硬化陽極

BF形可指定D變更
例：原D徑17，變更12.....D12

材質：鋁A6061+陽極處理。
(如需鐵材質請電洽加納窗口。)

齒數	TYPE	寬度	外形	孔形	軸孔d 加工最小值	P.D	O.D	齒數	D	E	Fod			
10	XL-019			圓孔	3~	16.17	15.66	10	10	12	18			
11						17.79	17.28	11				14.5	22.6	
12						19.40	18.9	12				15	25	
13						21.02	20.51	13				17	27	
14						22.64	22.13	14				18	28	
15						24.26	23.75	15				17	20	32
16						25.87	25.36	16						
17						27.49	26.98	17				21	24	35
18						29.11	28.6	18						
19						30.72	30.22	19				24	25	40
20	32.34	31.83	20											
21	33.96	33.45	21	26	30	45								
22	35.57	35.07	22											
23	37.19	36.68	23	30	34	47								
24	38.81	38.3	24											
25	40.43	39.92	25	35	38	53								
26	42.04	41.53	26											
27	43.66	43.15	27	40	40	55								
28	45.28	44.77	28											
29	46.89	46.39	29	44	62									
30	48.51	48	30											
31	50.13	49.62	31	45	65									
32	51.74	51.24	32											
33	53.36	52.85	33	52.5	67.5									
34	54.98	54.47	34											
35	56.6	56.09	35	40	59	73								
36	58.21	57.7	36											
37	59.83	59.32	37	60	80									
38	61.45	60.94	38											
39	63.06	62.56	39	65	85									
40	64.68	64.17	40											
41	66.3	65.79	41											
42	67.91	67.41	42											
43	69.53	69.02	43											
44	71.15	70.64	44											
45	72.77	72.26	45											
46	74.38	73.87	46											
47	76	75.49	47											
48	77.62	77.11	48											
49	79.23	78.73	49											
50	80.85	80.84	50											

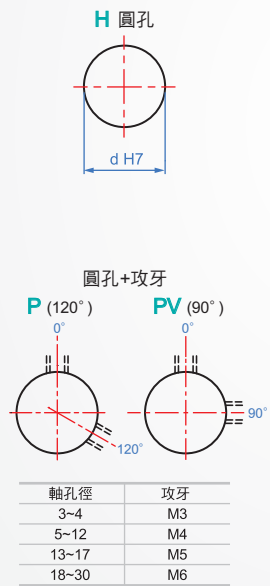

※齒數50以上資料不及備載，詳細請查詢加納網站