


steel body

GZ441

Stop payment fixed at 90 degrees

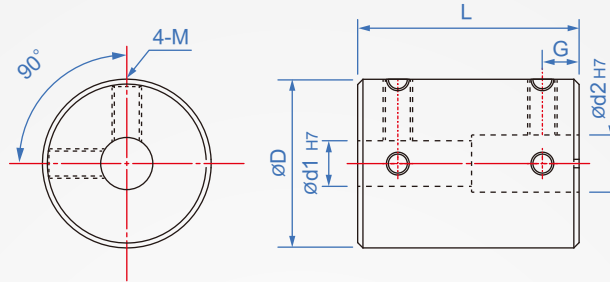

ontology	Set screw
A6061 (white anode)	SCM435 (blackened)
SUS304	SUS304

How to order

1 2 3
GZ441 - 20 - 30 - 6 x 8 -
TYPE D L d1xd2
 Choose body material
 A6061.....
 SUS304..... SUS

outer diameter D	L	d1 \ d2		material	G	maximum torque (N · M)	Maximum speed (rpm/min)	Screw tightening torque		moment of inertia (kg · m ²)		quality(g)	
		min.	max.					M	(N · M)	AL	SUS	AL	SUS
16	16	3	~ 8	AL (aluminum alloy)	5	1.5	23000	M3	1.2	3.0x10 ⁻⁷	7.2x10 ⁻⁷	6	18
	24	4	~ 8		6		23000			3.0x10 ⁻⁷	8.0x10 ⁻⁷	10	30
20	20	4	~ 10		7	3	18000	M4	2.5	8.5x10 ⁻⁷	8.2x10 ⁻⁶	14	45
	30				7		18000			8.5x10 ⁻⁷	2.2x10 ⁻⁶	19	57
25	25	5	~ 12		8	3.6	14000	M5	5	2.5x10 ⁻⁶	6.0x10 ⁻⁶	25	75
	36				9		14000			2.5x10 ⁻⁶	7.1x10 ⁻⁶	38	114
32	32	6	~ 16	9	4.5	11000	M6	8	7.0x10 ⁻⁶	2.0x10 ⁻⁵	60	180	
	41			10		11000			7.0x10 ⁻⁶	2.4x10 ⁻⁵	70	210	
40	44	8	~ 20	11	5.7	4000	M6	8	1.5x10 ⁻⁵	3.75x10 ⁻⁵	118	354	
	55			13		4000			7.0x10 ⁻⁵	9.0x10 ⁻⁵	235	705	
50	66	10	~ 25	15	13.5	4000			7.0x10 ⁻⁵	9.5x10 ⁻⁵	300	900	

unit: mm

Copyright © CHENA INDUSTRIAL CO., LTD ALL RIGHTS RESERVED.