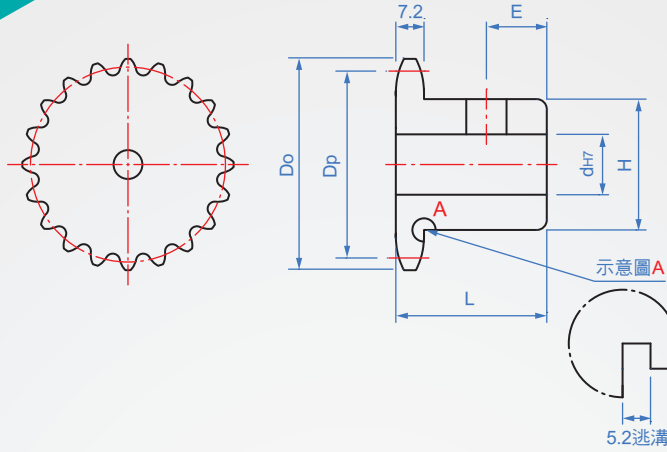


Pitch : 12.7 mm

## RS40B



註：8~13齒有標註\*的部分，輪殼有加工5.2的逃溝。

材質 表面處理

S45C  
(齒尖高週波)

-  
染黑  
無電解鍍

\* 防止付螺絲

How to order

RS40B - 18 - N9 -

TYPE 齒數 孔形



選擇表面處理

無處理.....

染黑.....

無電解鍍.....

單位：mm

齒數	Dp	Do	孔形	dh7	H	L	E	齒數	質量 (kg)			
8*	33.20	38	鍵槽+攻牙  <b>NV</b> 攻牙90°   <b>N</b> 攻牙120° 	8~13	25	25	7	8	0.1			
9*	37.13	42		8~14	28			9	0.11			
10*	41.10	46		8~18	32			10	0.14			
11*	45.08	51			37			11	0.18			
12*	49.07	55			40			12	0.22			
13*	53.07	59		10~20	43			13	0.22			
14	57.07	63			42			14	0.28			
15	61.08	67			46	15	0.33					
16	65.10	71			50	16	0.39					
17	69.12	76		12~25	54	30	10	17	0.45			
18	73.14	80			57			18	0.51			
19	77.16	84			60			19	0.58			
20	81.18	88		12~25	60	35	12	20	0.75			
21	85.21	92						21	0.84			
22	89.24	96						22	0.93			
23	93.27	100						23	1			
24	97.30	104						24	0.82			
25	101.33	108						25	0.85			
26	105.36	112		14~30	65	40	15	26	0.89			
27	109.40	116	27					0.93				
28	113.43	120	28					0.97				
29	117.46	124	29					1.05				
30	121.50	128	30					1.02				
31	125.53	133	31					1.2				
32	129.57	137	32					1.29				
33	133.61	141	33					1.3				
34	137.64	145	34					1.39				
35	141.68	149	14~33	65	40	15	35	1.44				
36	145.72	153					36	1.48				
38	153.79	161					38	1.58				
40	161.87	169					40	1.7				
41	165.91	173					17~40	70	40	15	41	1.82
42	169.95	177									42	2.02
43	173.98	181	43	2.23								
44	178.02	185	44	2.14								
45	182.06	189	45	2.41								
48	194.18	201	48	2.41								
50	202.26	209	17~40	73	40	15	50	2.55				
54	218.42	226					54	2.85				
60	242.66	250					60	3.34				

■ 鍵槽 新JIS\_B\_1301

軸孔徑	kw(Js9)	kh	攻牙
8 ~ 10	3	1.4	M4
NK10	4	1.8	M5
11 ~ 12	4	1.8	
13 ~ 17	5	2.3	M6
18 ~ 22	6	2.8	
23 ~ 30	8	3.3	M8
31 ~ 38	10	3.3	
39 ~ 44	12	3.3	

版權所有 重製必究