




70%壓縮量


CC151

1/9 (最輕)

- ◆外徑D容許公差：φ 16以下 ⁺⁰/_{-0.5mm}
- ◆自由長度L：50以下 ±1.5mm
- ◆端部研削：此系列無研削
- ◆使用回數：約100萬回。

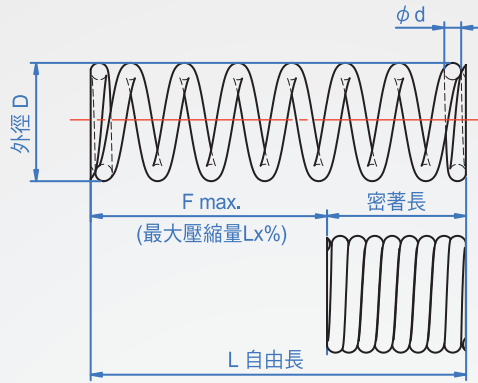

| 材質 | 耐熱度 | 卷方向 |
|----------------------|-----|-----|
| SUS-WP JIS G 4314 | 80° | 右 |



How to order

1 2 3
 CC151 - 3 - 15 - 0.18
TYPE 外徑 長度 線徑

版權所有 重製必究

| 外徑D | L | 線徑d | 密著長 | 最大壓縮量 | | 荷重 N/max | 係數 ±10% |
|-----|------|------|-----|-------|--------|-------------|--------------|
| | | | | L x % | F max. | | |
| 3 | 5 | 0.15 | 1.1 | 70% | 4 | 0.02 | 0.05 N/mm |
| | 10 | 0.18 | 2.5 | 70% | 7 | 0.04 | |
| | 15 | 0.18 | 2.5 | 70% | 11 | 0.05 | |
| | 20 | 0.20 | 3.3 | 70% | 14 | 0.07 | |
| | 25 | 0.23 | 6.2 | 70% | 18 | 0.09 | |
| | 30 | 0.23 | 6.2 | 70% | 21 | 0.11 | |
| 4 | 5 | 0.18 | 1.2 | 70% | 4 | 0.02 | 0.05 N/mm |
| | 10 | 0.20 | 1.7 | 70% | 7 | 0.04 | |
| | 15 | 0.23 | 3.0 | 70% | 11 | 0.05 | |
| | 20 | 0.23 | 3.0 | 70% | 14 | 0.07 | |
| | 25 | 0.26 | 4.9 | 70% | 18 | 0.09 | |
| | 30 | 0.26 | 4.9 | 70% | 21 | 0.11 | |
| 5 | 5 | 0.20 | 1.2 | 70% | 4 | 0.02 | 0.05 N/mm |
| | 10 | 0.23 | 1.8 | 70% | 7 | 0.04 | |
| | 15 | 0.26 | 2.9 | 70% | 11 | 0.05 | |
| | 20 | 0.29 | 4.5 | 70% | 14 | 0.07 | |
| | 25 | 0.29 | 4.5 | 70% | 18 | 0.09 | |
| | 30 | 0.29 | 4.5 | 70% | 21 | 0.11 | |
| 6 | 10 | 0.26 | 2.0 | 70% | 7 | 0.04 | 0.05 N/mm |
| | 15 | 0.30 | 3.3 | 70% | 11 | 0.05 | |
| | 20 | 0.30 | 3.3 | 70% | 14 | 0.07 | |
| | 25 | 0.35 | 6.5 | 70% | 18 | 0.09 | |
| | 30 | 0.35 | 6.5 | 70% | 21 | 0.11 | |
| | 35 | 0.35 | 6.5 | 70% | 25 | 0.12 | |
| 8 | 10 | 0.30 | 1.9 | 70% | 7 | 0.04 | 0.05 N/mm |
| | 15 | 0.35 | 3.2 | 70% | 11 | 0.05 | |
| | 20 | 0.35 | 3.2 | 70% | 14 | 0.07 | |
| | 25 | 0.40 | 5.6 | 70% | 18 | 0.09 | |
| | 30 | 0.40 | 5.6 | 70% | 21 | 0.11 | |
| | 35 | 0.40 | 5.6 | 70% | 25 | 0.12 | |
| | 40 | 0.45 | 9.3 | 70% | 28 | 0.14 | |
| | 45 | 0.45 | 9.3 | 70% | 32 | 0.16 | |
| 50 | 0.45 | 9.3 | 70% | 35 | 0.18 | | |

※荷重的計算式：荷重(N)=係數x壓縮量
 ※牛頓N轉換kgf：kgf=N x 0.102
 ※密著長是參考值，製作時會有少許差異。

計算例：CC151-5-30-0.5
 自由長30時(如壓縮5mm)到25時的荷重
 荷重=係數×拉伸量
 0.25N=0.05N/mm × 5mm