


樹脂齒輪 壓力角20°

## M1 M1.5

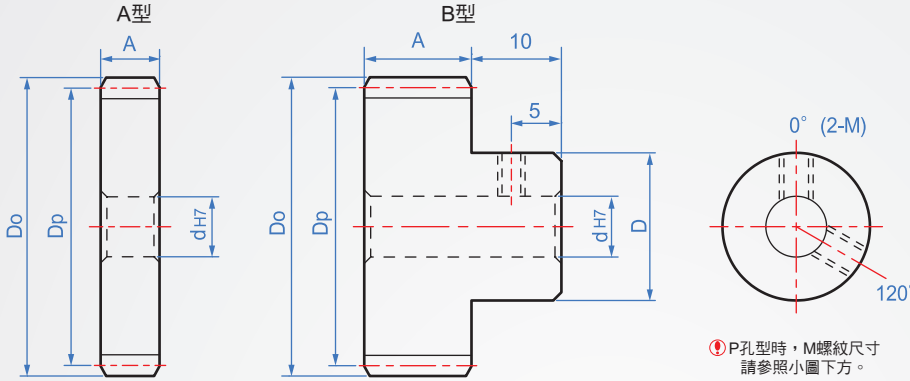

材質	顏色
<b>GW</b> POM 塑鋼	白色
<b>GB</b>	黑色
<b>GM</b> MC 尼龍	藍色
<b>GK</b> PEEK 塑鋼	卡其色

**How to order**

1 2 3 4 5  
 □ - 50 - M1 - 9.5 - B - P6 - □  
 材質 齒數 模數 A 輪形 孔形

選擇材質與顏色

白色POM..... **GW**  
 黑色POM..... **GB**  
 MC..... **GM**  
 PEEK..... **GK**

B形可指定D徑變更  
 例：原D徑35，可變更為33..... **D33**

單位：mm

版權所有 重製必究

齒數	模數	齒面寬度 A	外形	孔形	最小孔徑 d	輪轂 D	齒數	分度圓徑 Dp	齒頂 Do
15	M1	9.5	A	H 圓孔	5~	12	15	15	17
16							16	18	
18							18	20	
20							20	22	
22							22	24	
24							24	26	
25							25	27	
26							26	28	
28							28	30	
30							30	32	
32							32	34	
35							35	37	
36							36	38	
40							40	42	
45	45	47							
48	48	50							
50	50	52							
55	55	57							
60	60	62							
70	70	72							
75	75	77							
80	80	82							
90	90	92							
100	100	102							
16	M1.5	12.7	B	圓孔+攻牙 P (120°) PV (90°)	6~	20	16	24	27
18							18	30	
20							20	33	
22							22	36	
24							24	39	
25							25	40.5	
26							26	42	
28							28	45	
30							30	48	
32							32	51	
36							36	57	
40							40	63	
50							50	78	
60							60	93	
70	70	108							
80	80	123							

※齒數資料不及備載，詳細請查詢加納網站  
 ※D 徑尺寸可依據設計變更。