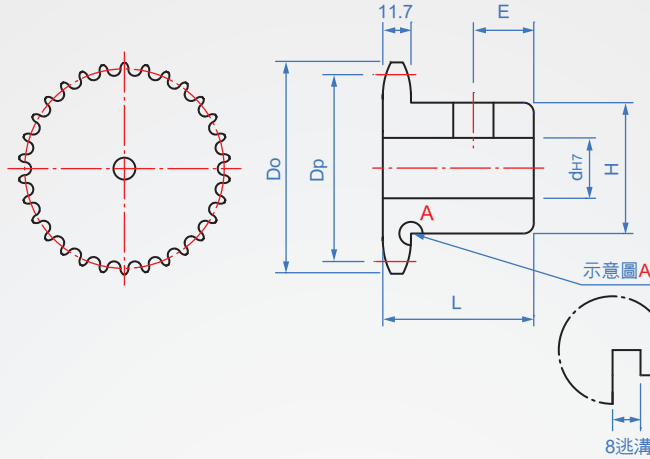


Pitch : 19.05 mm

RS60B



註：8~11齒有標註*的部分，
輪殼有加工8的逃溝。

材質 表面處理

S45C
(齒尖高週波)

-
染黑
無電解鍍

* 附止付螺絲

How to order

RS60B - 18 - N10 -

TYPE 齒數 孔形

選擇表面處理

無處理.....



染黑.....

無電解鍍.....

1

2

單位：mm

齒數	Dp	Do	孔形	dh7	H	L	E	齒數	質量 (kg)
8*	49.78	57	鍵槽+攻牙 NV 攻牙90°  N 攻牙120° 	8 ~ 15	37	31.8	8	8	0.35
9*	55.70	63		10 ~ 18	43	35	10	9	0.39
10*	61.65	70		49	10			0.48	
11*	67.62	76		55	11			0.58	
12	73.60	83		54	12			0.67	
13	79.60	89		65	13	0.82			
14	85.61	95		70	14	0.95			
15	91.62	101		16 ~ 25	70	40	12	15	1.13
16	97.65	107						16	1.3
17	103.67	113						17	1.39
18	109.71	119						18	2
19	115.74	126						19	2.08
20	121.78	132						20	2.19
21	127.82	138		18 ~ 30	80	45	15	21	2.29
22	133.86	144	22					2.41	
23	139.90	150	23					2.53	
24	145.95	156	24					2.65	
25	151.99	162	25					2.78	
26	158.04	168	20 ~ 50					85	45
27	164.09	174		27	3.02				
28	170.14	180		28	3.16				
29	176.20	187		29	3.2				
30	182.25	193		30	3.47				
31	188.30	199		20 ~ 60	87	45	15		
32	194.35	205	32					3.79	
33	200.41	211	33					3.85	
34	206.46	217	34					4.14	
35	212.52	223	35					4.32	
36	218.57	229	36					4.51	
37	224.63	235	20 ~ 60	87	45	15	37	4.6	
38	230.69	241					38	4.9	
39	236.74	247					39	4.95	
40	242.80	253					40	5.31	
41	248.36	260					41	5.5	
42	254.92	266					42	6.28	
45	273.09	284	20 ~ 60	87	45	15	45	6.96	
48	291.27	302					48	7.7	
50	303.39	314					50	8.22	

■ 鏈槽 新JIS_B_1301

軸孔徑	kw(Js9)	kh	攻牙
8 ~ 10	3	1.4	M4
NK10	4	1.8	M5
11 ~ 12	4	1.8	
13 ~ 17	5	2.3	M6
18 ~ 22	6	2.8	
23 ~ 30	8	3.3	M8
31 ~ 38	10	3.3	
39 ~ 44	12	3.3	
45 ~ 50	14	3.8	M10
51 ~ 58	16	4.3	
59 ~ 65	18	4.4	